


## HALOGEN MODULAR HEATERS

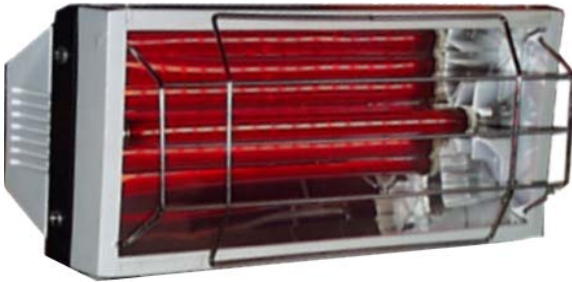

- ✓ NO WARM-UP TIME
- ✓ NO HEAT WASTAGE
- ✓ INSTANT CONTROLLABILITY
- ✓ CLEAN & ENERGY EFFICIENT
- ✓ LOW COST INSTALLATION

NO WARM-UP TIME - HALOGEN MODULAR HEATERS TAKE LESS THAN 1 SECOND TO PEAK RADIATION.

NO HEAT WASTAGE - ORDINARY HEATING METHODS WORK MAINLY BY CONVECTION OR CONDUCTION IN TURN THEY HEAT THE AIR WHICH THEN HEATS THE PERSONNEL. IN AREAS WHICH ARE LARGE, OPEN OR DRAFTY, THESE METHODS ARE SLOW, INEFFICIENT AND EXPENSIVE TO RUN.

HALOGEN MODULAR HEATERS DIRECT THE HEAT AT PEOPLE AND OBJECTS , NOT THE AIR AROUND THEM.

INSTANT CONTROLLABILITY - EITHER BY MOTION DETECTORS OR DIGITAL POWER CONTROLLERS

CLEAN & ENERGY EFFICIENT - ELECTRIC HEATING IS THE CLEANEST NON POLLUTING FORM OF HEAT AVAILABLE TODAY. ENERGY EFFICIENT DUE TO THE FACT HALOGEN MODULAR HEATERS CAN DIRECT THE HEAT INSTANTLY WHERE AND WHEN REQUIRED.

LOW COST INSTALLATION - FROM A SIMPLE 240 VOLT POWER OUTLET THESE HEATERS CAN BE INSTALLED.

APPLICATION - GENERAL COMMERCIAL, INDUSTRIAL INDOOR USE.

FACTORIES, LOADING BAYS, CANTEENS, WAREHOUSES, AIRCRAFT HANGERS, CHURCHES, COMMUNITY HALLS AND SCHOOLS.

CONSTRUCTION - TUNGSTEN HALOGEN LAMPS, 240 VOLTS 1500 WATT. REFLECTOR BRIGHT ROLLED ALUMINIUM. CASE WHITE POWDER COATED STEEL. END COVERS ALUMINIUM CASTING FOR HEATSINK EFFECT. BRACKETS GREY POWDER COATED STEEL. ELECTRICAL CONNECTION REAR TERMINAL BLOCK VIA CABLE CLAMP.

TEMPERATURE RANGE - 0 TO 40 °C

CATALOGUE #	DIMENSIONS MM	VOLTAGE	WATTAGE
HMI 1.5	370 X 170 X 120	240	1500
HMI 3.0	370 X 340 X 120	240	3000

### MANUFACTURING PLANTS

MELBOURNE TEL: (03) 9556 0222  
SYDNEY TEL: (02) 9638 7055

ADELAIDE TEL: (08) 8445 1477  
PERTH TEL: (08) 6278 4008

BRISBANE TEL: (07) 3341 5222  
Web: [www.helios.com.au](http://www.helios.com.au)