


## ADVANTAGES

LN have a range of elements for you to bend yourself, here are some advantages.

**ELEMENTS ARE EX-STOCK  
FIX BREAKDOWNS QUICKLY & EFFICIENTLY  
BEND TO SUIT YOUR NEEDS ON SITE**

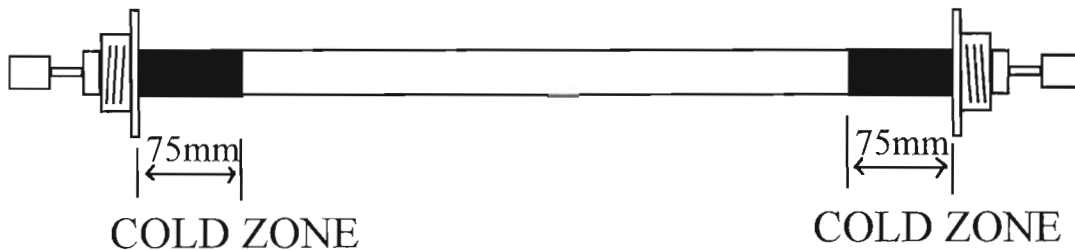

## ELEMENT BENDING SUGGESTIONS


Do not bend elements in cold zone (75mm from gland).

If you require elements with tighter end bends specify this when ordering and we will end bend to your specifications.

Do not try and straighten bends as this could fracture the sheath.



**ALLOY SHEATHED ELEMENTS**  
SURFACE LOADING 32KW/SQ M

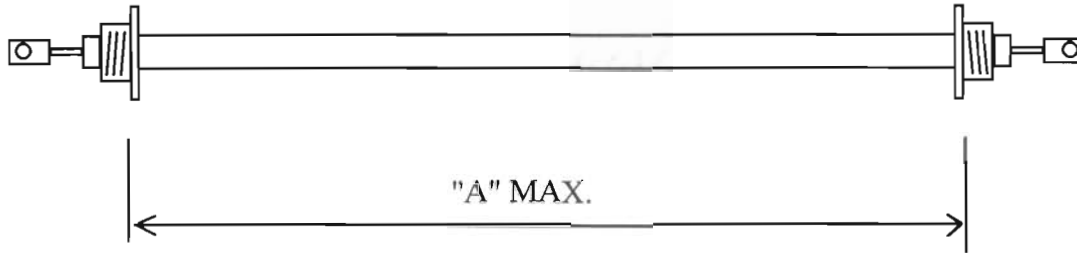


ELEMENTS COME WITH 1/2" LONG BRASS GLANDS (GBG 2) TO FIT 16mm DIAMETER HOLE, FIBRE WASHERS AND BRASS NUTS.

PART No.	RATING Watts	"A" MAX mm
DWS 6	600	795
DWS 10	1000	1207
DWS 12	1200	1538
DWS 15	1500	1899
DWS 18	1800	2293
DWS 20	2000	2621
DWS 24	2400	3004

THESE ELEMENTS ALSO COME IN STANDARD FORMS TO SUIT WET & DRY BAIN - MARIES ( HOT FOOD BARS ) AND ARE SHOWN ON PAGE 59 AND 60.

**ALLOY SHEATHED ELEMENTS**  
SURFACE LOADING 48KW/SQ M

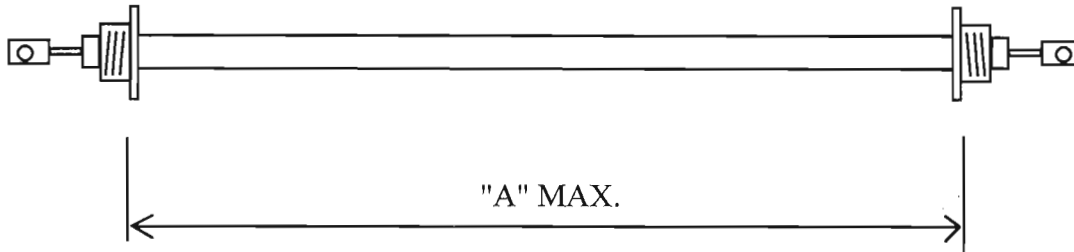

ELEMENTS COME WITH 1/2" LONG BRASS GLANDS (GBG 2) TO FIT 16mm DIAMETER HOLE, FIBRE WASHERS AND BRASS NUTS.

PART No.	RATING Watts	"A" MAX mm
DBS 5	500	544
DBS 7	750	770
DBS 10	1000	975
DBS 12	1200	1148
DBS 15	1500	1368
DBS 18	1800	1678
DBS 20	2000	1840
DBS 24	2400	2356
DBS 30	3000	2695
DBS 36	3600	3160


THESE ELEMENTS ALSO COME IN STANDARD FORMS TO SUIT WET BAIN - MARIES ( HOT FOOD BARS ) AND ARE SHOWN ON PAGE 59 AND 60.



**COPPER SHEATHED ELEMENTS**

SUITABLE FOR WATER HEATING ONLY

SURFACE LOADING 120KW/SQ M

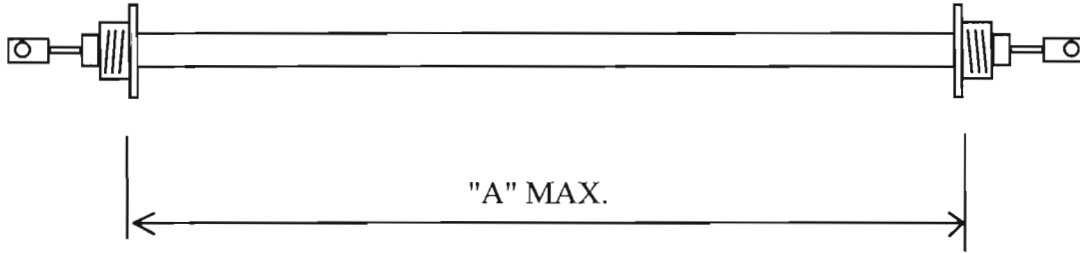


ELEMENTS COME WITH 1/2" LONG BRASS GLANDS (GBG 2) TO FIT 16mm DIAMETER HOLE, FIBRE WASHERS AND BRASS NUTS.

PART No.	RATING Watts	"A" MAX mm
SNB 5	500	455
SNB 7	750	455
SNB 10	1000	509
SNB 12	1200	538
SNB 15	1500	569
SNB 18	1800	659
SNB 20	2000	735
SNB 24	2400	928
SNB 30	3000	1078
SNB 36	3600	1348

**COPPER SHEATHED ELEMENTS**

SUITABLE FOR WATER HEATING ONLY

SURFACE LOADING 120KW/SQ M

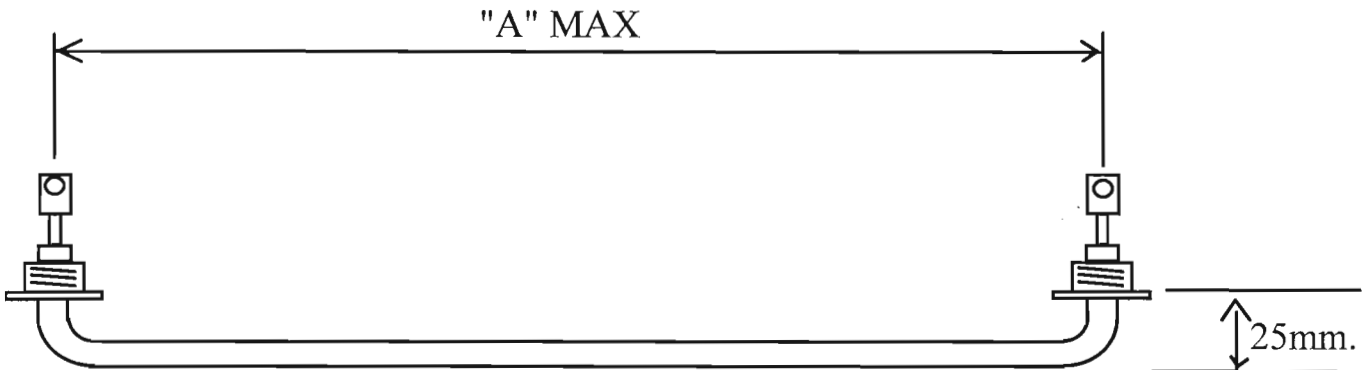

ELEMENTS COME WITH 1/2" LONG BRASS GLANDS (GBG 2) TO FIT 16mm DIAMETER HOLE, FIBRE WASHERS AND BRASS NUTS.

PART No.	RATING Watts	"A" MAX mm
SEB 5	500	415
SEB 7	750	415
SEB 10	1000	469
SEB 12	1200	498
SEB 15	1500	529
SEB 18	1800	619
SEB 20	2000	695
SEB 24	2400	888
SEB 30	3000	1038
SEB 36	3600	1308